

# Astra S

LINE



## DESCRIPTION

Elevate your lighting experience with Astra S luminaire. Merging elegance and functionality, this extraordinary luminaire not only provides general illumination but also adds a touch of sophistication to any space.

The Astra S luminaire - due to its appearance, it will become an excellent design addition to your interior.

Whether suspended above a dining table, illuminating a grand foyer, or making a statement in a contemporary office, Astra S effortlessly adapts to various environments, adding a touch of refinement and a sense of grandeur to every setting. Thanks to independent hangers, the Astra S can be hung at any angle and even on a sloping surface.



### **Laconic appearance.**

Luminaire for design general lighting.



### **Versatility.**

The luminaire can be hung at different angles to a horizontal surface.



**One diffuser for soft general lighting.**




website

## General specifications

Type of luminaire	Line (linear light)
Application areas	general lighting
Supply unit	LED driver
Nominal voltage	230V, 50Hz
Lighting technology	LED SMD 2835
Optic	PC
Power factor	0.95
Cooling	passive
Body	aluminum
Weight	1.2/1.6 kg.
Package	Single / group
Life time	50,000 hours.
Warranty	5 years/50,000 hours
Certification	CE, UKCA, UA

## Dimensions

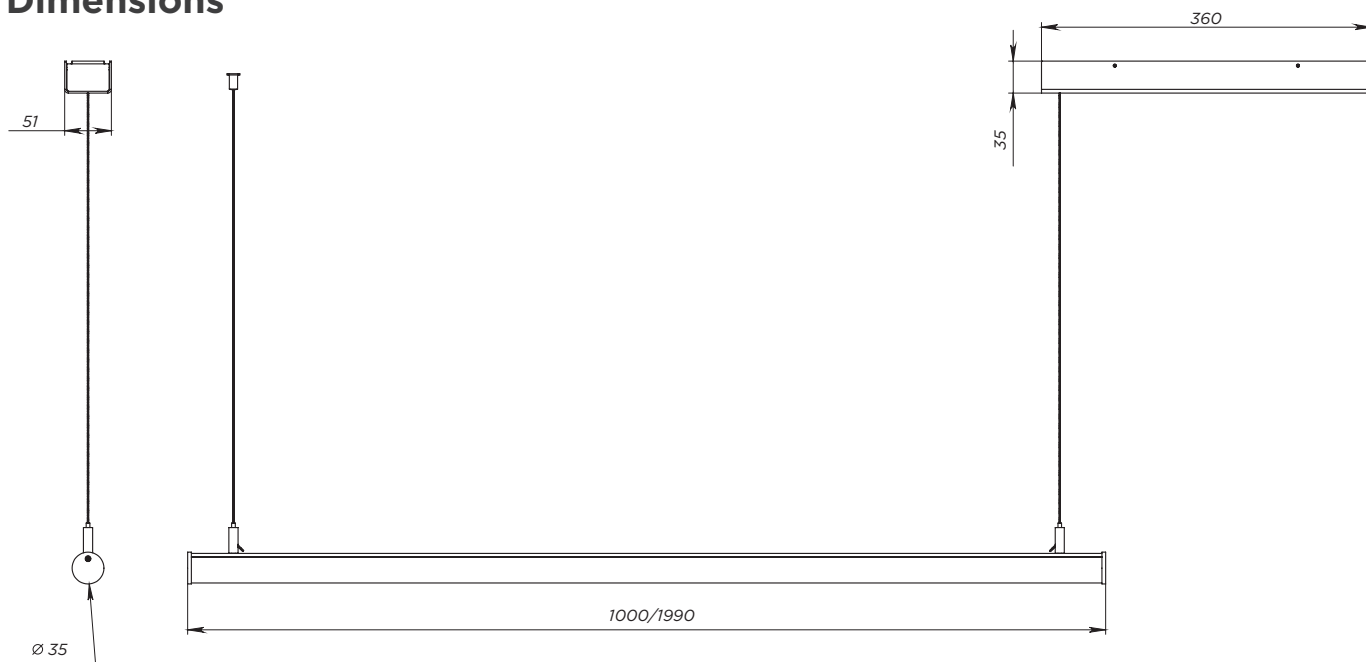

## Scope of application



# Astra S


LINE

## Nomenclature

Luminaire Astra S												
Order type	Conditional length	Type of luminaire board	Luminaire Filter Type	Luminaire Beam Angle	Luminaire Power, W	CRI/ Color temperature, K	Luminaire Color Temperature, K	Luminaire Mounting Type	Luminaire IP Rating	Luminaire Housing Color		
SO	1000	1R	OF	120°	25	8	3500 4000	SP	IP20	BL black RAL 9005		
	2000				30					35	40	WH white RAL9016

The deviation of actual power consumption from the specified values does not exceed  $\pm 5\%$ ;  
 The luminous flux calculation is based on LEDs with a color temperature of 4000K, CRI80. The deviation of luminous flux from the specified values does not exceed  $\pm 10\%$

## Beam angle

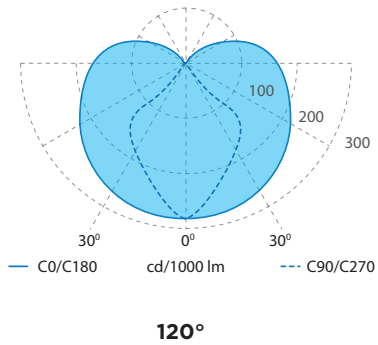

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 °C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.