

# Baseline

LINE



## DESCRIPTION

Style, design, and a great price are successfully combined in the Baseline linear trunking light.

Its popularity is unmatched, making it ideal for illuminating shelves and aisles, while also easily blending with various design solutions.



**Versatility.** With this lamp you can easily create a great ambient or to create a great ambient or accent lighting or accent lighting.



**Power.** Allows you to use to use fewer luminaires per project. luminaires per project.



**The ability to combine of optics.** You can combine several optical elements in one one luminaire for different lighting tasks on parallel shelves.




website

## General specifications

Type of luminaire	Line (linear light)
Application areas	general lighting
Supply unit	LED Driver integrated
Nominal voltage	230V, 50Hz
Lighting technology	LED SMD 2835
Optic	PMMA
Power factor	0.95
Cooling	passive
Body	aluminum
Weight	1,5/2,5/3,2/4,5 kg
Package	Single / group
Life time	50,000 hours.
Warranty	5 years/50,000 hours
Certification	CE, UKCA, UA

## Dimensions

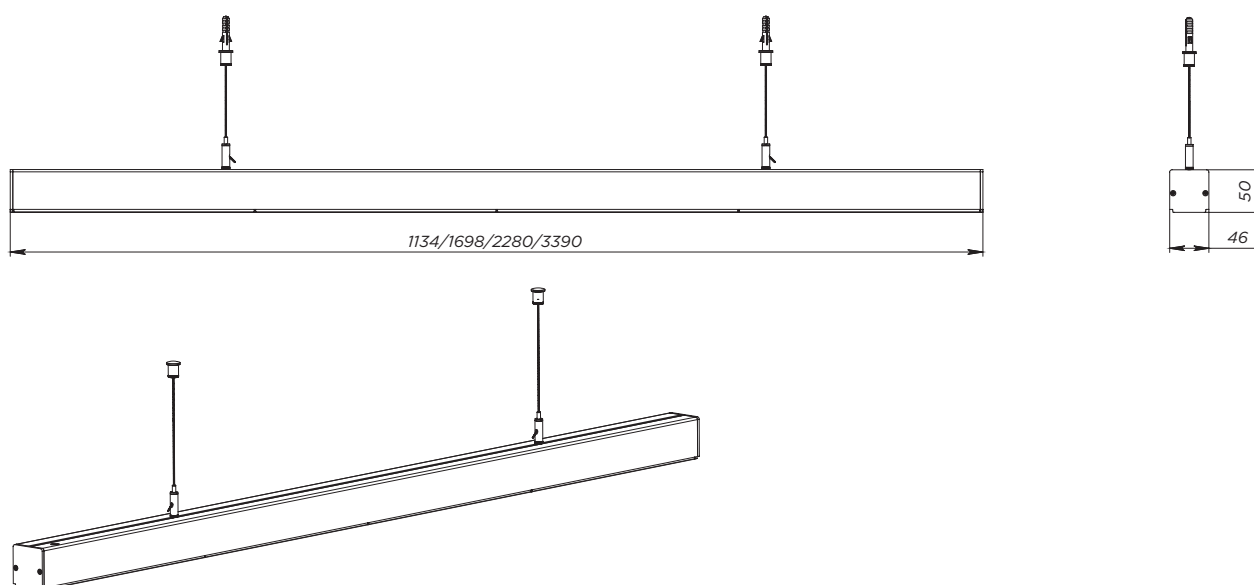

## Scope of application



# Baseline


## LINE

### Nomenclature


Luminaire LINE Baseline													SO	1700	CM	3x1.5	1R	LF	90°	50W	840	SP	IP21	BL
Order Type	Conditional length	Linear luminaire configuration	Type of main cable for a linear luminaire	Type of luminaire board	Luminaire Filter Type	Luminaire Beam Angle	Luminaire Power, W	Luminaire Color Rendering Index (CRI)	Luminaire Color Temperature, K	Luminaire Mounting Type	Luminaire IP Rating	Luminaire Housing Color												
SO	1200	SN	3x1.5	1R	LF	90°	25	8	3000	SP	IP21	BL black RAL 9005												
		CM					30																	
		CE					35																	
	CS	40					WH white RAL9016																	
	CMR	45																						
	CSR	50																						
	CER	55																						
	CML	45																						
	CSL	50																						
	2200	3400					CEL					55												
												60												
												65												
												70												
												80												
												90												
												100												
			110																					

The deviation of actual power consumption from the specified values does not exceed ±5%;  
 The luminous flux calculation is based on LEDs with a color temperature of 4000K, CRI80. The deviation of luminous flux from the specified values does not exceed ±10%


## Beam angle

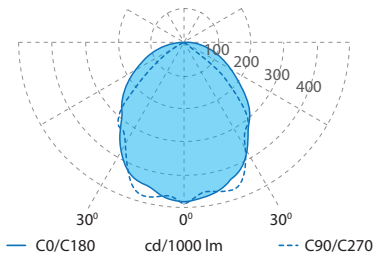

**90°**

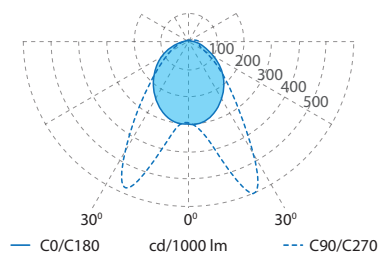

**DS20Wx90**

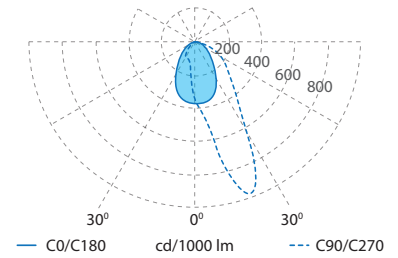

**AS20Wx60**

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 °C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.