

FastLine 3PH-D

LINE



DESCRIPTION

The Fastline 3PH-D luminaire is designed with aesthetics in mind, while maintaining flexibility and efficiency. Its slim and compact body makes it ideal for perimeter lighting and specific graphic zones.

The flexibility and innovation of this luminaire take LED lighting to a new level.



Speed of installation and replacement. Installation and dismantling do not require special tools and takes a few minutes.




Versatility. With this luminaire you can easily create a general or accent light.



General specifications

Type of luminaire	Line (linear light)
Application areas	general lighting
Supply unit	LED Driver integrated
Nominal voltage	230V, 50Hz
Lighting technology	LED SMD 2835
Optic	PMMA
Power factor	0.95
Cooling	passive
Body	aluminum
Weight	1/1.3 kg
Package	Single / group
Life time	50,000 hours.
Warranty	5 years/50,000 hours
Certification	CE, UKCA, UA

Dimensions

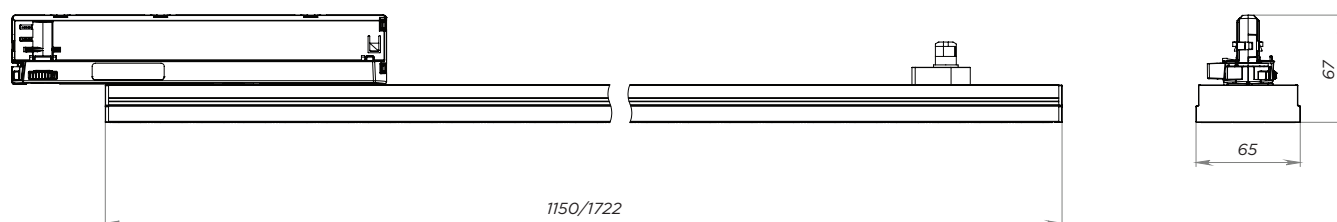

Scope of application



FastLine 3PH-D

LINE


Nomenclature

Order type	Conditional length	Linear luminaire configuration	Type of luminaire board	Luminaire Filter Type	Luminaire Beam Angle	Luminaire Power, W	Luminaire Color Rendering Index (CRI)	Luminaire Color Temperature, K	Luminaire Mounting Type	Luminaire IP Rating	Luminaire Housing Color
SO	1200	SN	1R	LF	120° AS18Nx90 DS40Wx90 DS25Wx120K	20 25 30 35 40	8	3000 3500 4000	3PH-D	IP21	BL black RAL 9005
	1700					20 25 30 35 40	9	3000 3500 4000			WH white RAL9016
	1200		3R		90° 110° AS25Wx120 DS30Wx80 DS35Wx110	20 25 30 38					
	1700					20 25 30 38					


The deviation of actual power consumption from the specified values does not exceed ±5%;
 The luminous flux calculation is based on LEDs with a color temperature of 4000K, CRI80. The deviation of luminous flux from the specified values does not exceed ±10%

Beam angle


1R

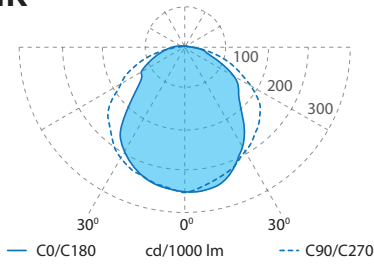


120°

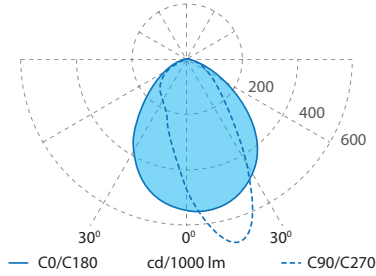

AS18Nx90

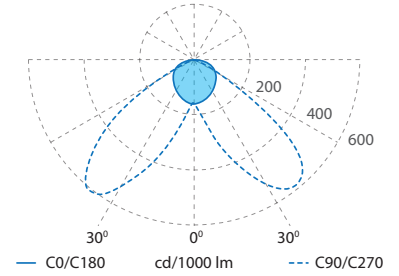


DS40Wx90

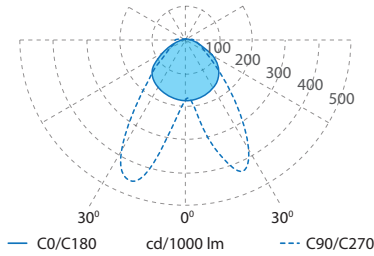


DS25Wx120


3R

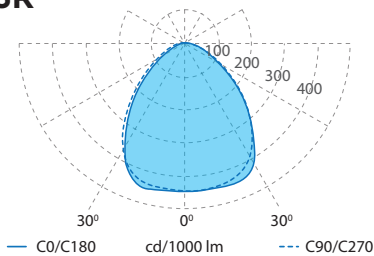


90°

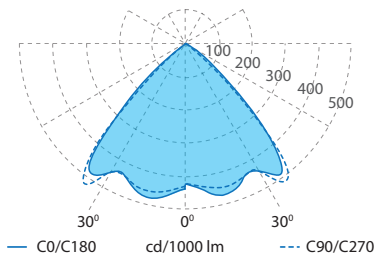


110°

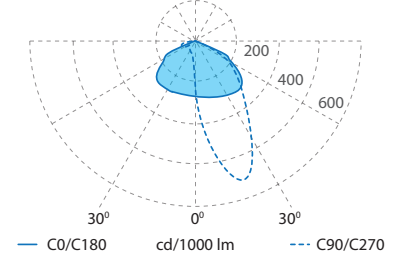

AS25x120

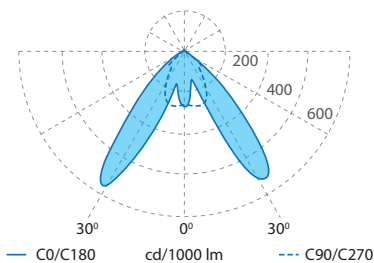

DS30Wx80

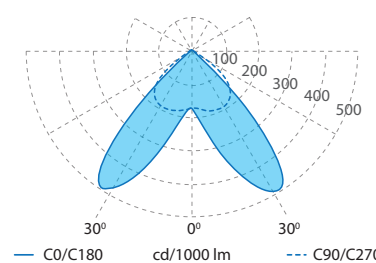

DS35Wx110

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 °C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.