

Plano 2.0 BI

LINE



DESCRIPTION

The Plano 2.0 recessed ceiling light is an ideal solution for accent and general lighting, effectively and evenly illuminating rooms with high ceilings.

The Plano 2.0 features a sleek, modern design and offers uniform light distribution, complemented by a diverse selection of optics for various applications.



Versatility. With this lamp, you can easily create a general diffused or accent light.



Power. Allows the use of fewer luminaires per project.



Possibility to combine optics. You can combine multiple optics in one luminaire for different lighting tasks on parallel shelves.




Flexibility in lighting settings. Allows you to direct the light of each lamella separately, by turning it within 15 degrees relative to the horizontal plane.



General specifications

Type of luminaire	Line (linear light)
Application areas	general and accent lighting
Supply unit	LED Driver integrated
Nominal voltage	230V, 50Hz
Lighting technology	LED SMD 2835
Optic	PC
Power factor	0,95
Cooling	passive
Body	Aluminum
Weight	2,6 kg
Package	Single
Life time	50,000 hours.
Warranty	5 years/50,000 hours
Certification	CE, UKCA, UA

Dimensions

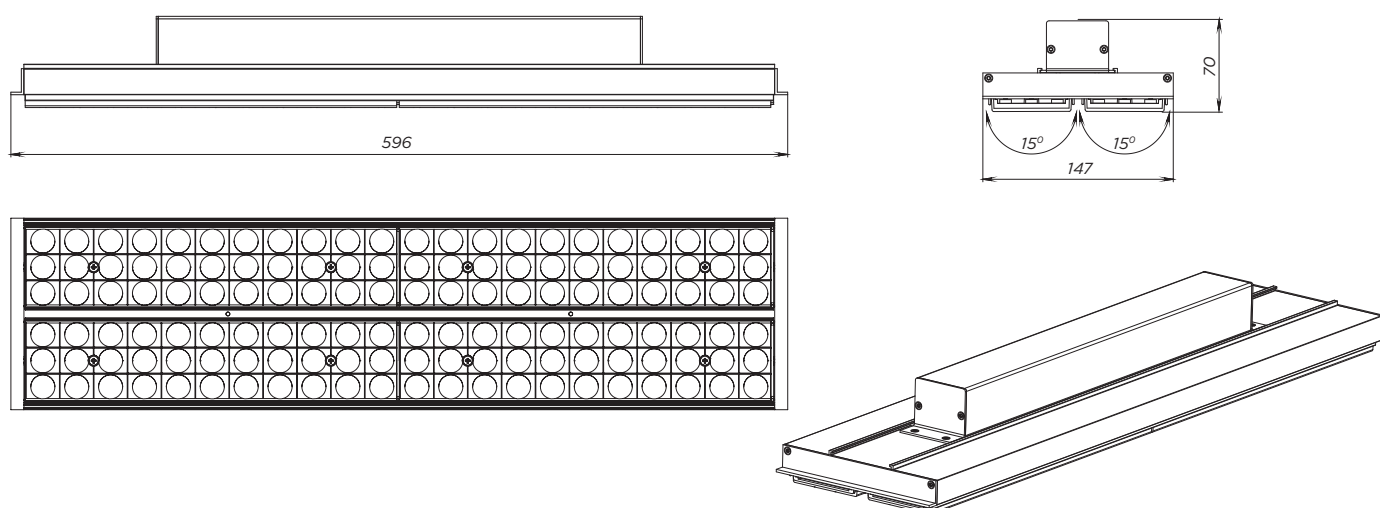

Scope of application



Plano 2.0 BI


LINE

Nomenclature


Luminaire LINE Plano 2.0									
Order Type	Type of luminaire board	Luminaire Filter Type	Luminaire Beam Angle	Luminaire Power, W	Luminaire Color Rendering Index (CRI)	Luminaire Color Temperature, K	Luminaire Mounting Type	Luminaire IP Rating	Luminaire Housing Color
SO	3R	LF	90° AS25Wx120 DS25Wx120 DS24Wx120	25 30 35 40 45 50 55 60 65 70 75 80	8	3000 3500 4000	BI	IP21	BL black RAL 9005 WH white RAL9016

The deviation of actual power consumption from the specified values does not exceed $\pm 5\%$;
 The luminous flux calculation is based on LEDs with a color temperature of 4000K, CRI80. The deviation of luminous flux from the specified values does not exceed $\pm 10\%$


Beam angle

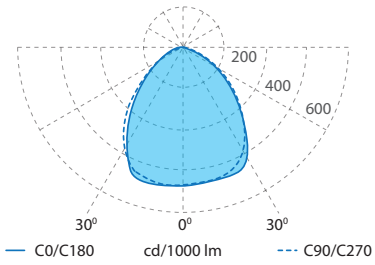


90°

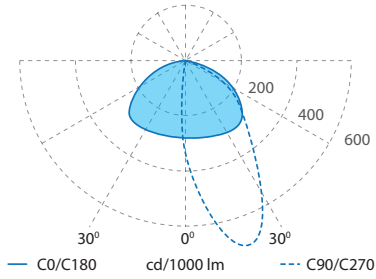

AS25WX120

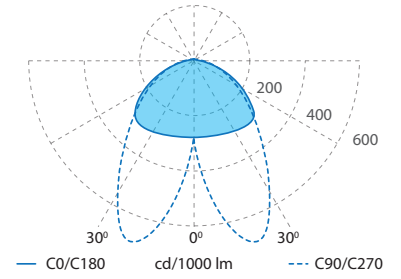

DS25WX120

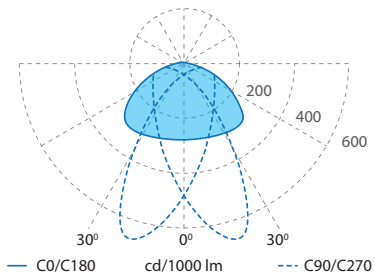

DS24WX120

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 °C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.