

Chill X SP3PH

SPOT



DESCRIPTION

The versatile Chill X SP3PH is designed for track lighting systems in shops and retail halls.

Its track-mounted suspension adapter allows for easy repositioning and height adjustment, ensuring effective illumination of products. The focused light highlights product details, making them more visually appealing to customers.



Adjustable height:

The height of the light can be adjusted for optimal accent lighting.



Ideal for product display cases:

Perfect for lighting product display cases, such as culinary items, cheeses, fish, etc.



Wide range of beam angles:

Various reflectors allow the light to produce either a narrow or wide beam of accent light.




website

General specifications

Type of luminaire	Spot (spot light module)
Application areas	Accent lighting
Supply unit	LED Driver integrated
Nominal voltage	230V, 50Hz
Lighting technology	LED COB
Optic	Aluminum reflector MIRO-Silver®
Power factor	0,95
Cooling	passive
Body	aluminum
Weight	1.12 kg
Package	Single / group
Life time	50 000 hours
Warranty	5 years/50 000 hours
Certification	CE, UKCA, UA

Dimensions

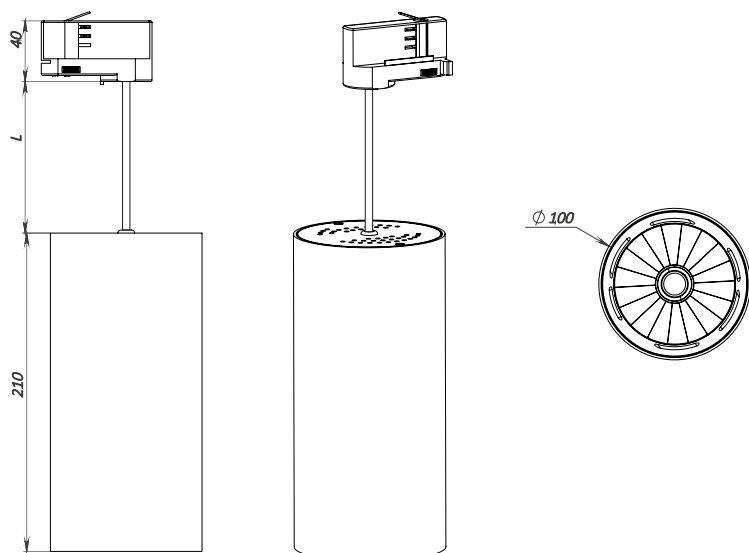

Scope of application



Chill X SP3PH


SPOT

Nomenclature


Luminaire SPOT Chill X										
SO	500	24°	13W	830	SP3PH	IP21	WH			
Order Type	Nominal length of a linear luminaire, mm	Luminaire Filter Type	Luminaire Beam Angle	Luminaire Power, W	Luminaire Color Rendering Index (CRI)	Luminaire Color Temperature, K	Special Luminaire Light	Luminaire Mounting Type	Luminaire IP Rating	Luminaire Housing Color
SO	500 1000 1500	HF	15°	13	8	3000	meat red meat white meat vivid elite bread bread vivid bakery cheese vegetables&fruits vegetables&fruits vivid fish white fish vivid fish premium color 3000 bright color 3000 bright color 3500 bright color 4000 true white premium white 3000 premium white 3500 premium white 4000	SP3PH SP1PH	IP21	BL black RAL 9005 WH white RAL 9016
			15°S	15		3500				
			17°S	17		4000				
			24°	19	9	2700				
			36°	22		3000				
			36°S	24		3500				
			60°	27		4000				
			62°x34°	30						
			34°x62°	35						

The deviation of actual power consumption from the specified values does not exceed ±5%;
The luminous flux calculation is based on LEDs with a color temperature of 4000K, CRI80. The deviation of luminous flux from the specified values does not exceed ±10%


Beam angle

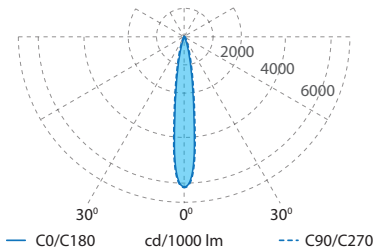


15°

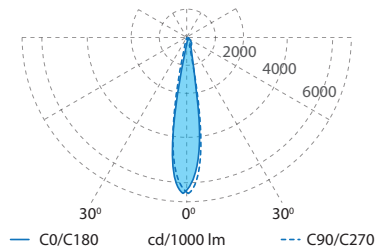


15°S

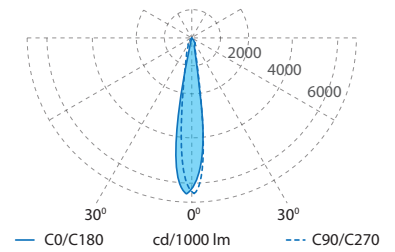


17°S

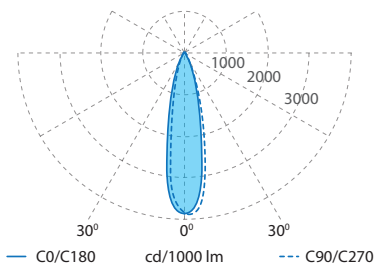


24°

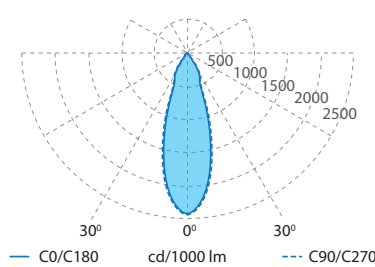


36°

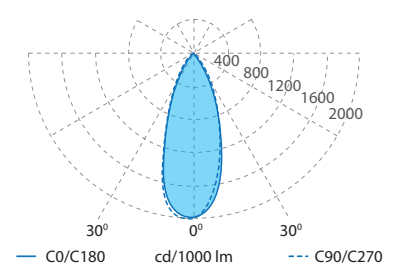


36°S

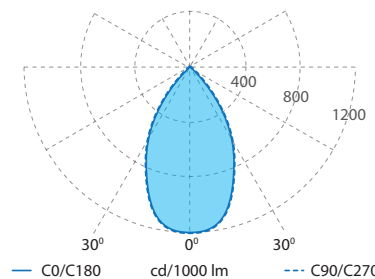

60°

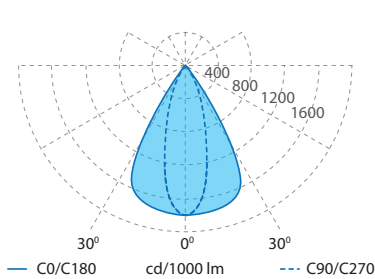

62°x34°

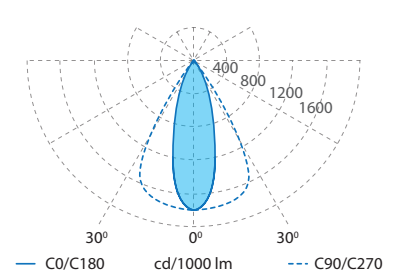

34°x62°

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 °C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.