

Mio 1PH

SPOT



DESCRIPTION

Mio 1PH features a compact, contemporary design and meets the highest standards of accent lighting. Designed for a single-phase track system, it is an ideal choice for smaller spaces with a moderate number of luminaires.

An optional version with a segmented reflector made of MIRO-Silver® material (designation S) is available, increasing luminous efficiency up to 97%.



Anti-glare ring: for increased visual comfort provided by the honeycomb filter.



Small body size.
The lamp is ideal for any interior and will not distract unnecessary attention.




Large selection of opening angles.
With the help of various reflectors, the luminaire can create a narrow or wide beam of accent light.



General specifications

Type of luminaire	Spot (spot light module)
Application areas	Accent lighting
Supply unit	LED Driver integrated
Nominal voltage	230V, 50Hz
Lighting technology	LED COB
Optic	Aluminum reflector MIRO-Silver®
Power factor	0,95
Cooling	passive
Body	aluminum
Weight	0,54 kg
Package	Single / group
Life time	50 000 hours
Warranty	5 years/50 000 hours
Certification	CE, UKCA, UA


Dimensions

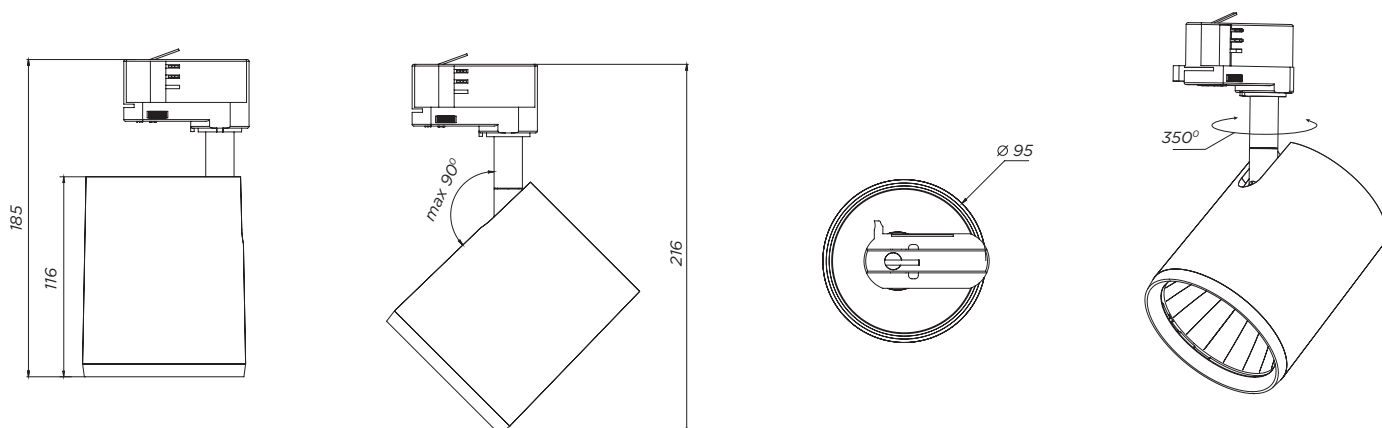


Scope of application




Beam angle

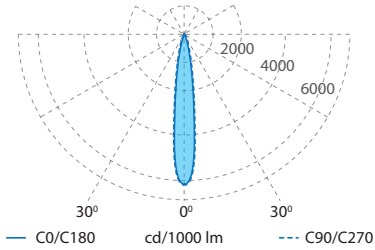


15°

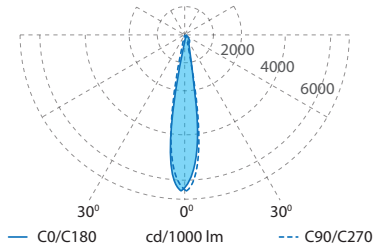


15°S

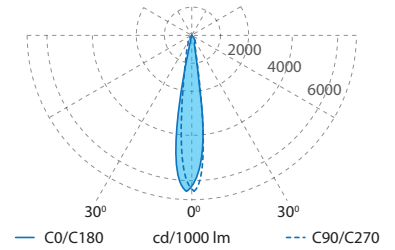


17°S

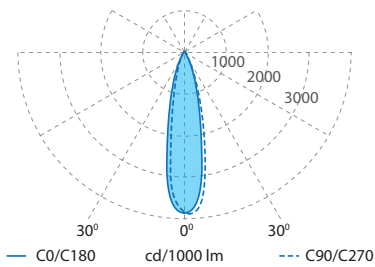


24°

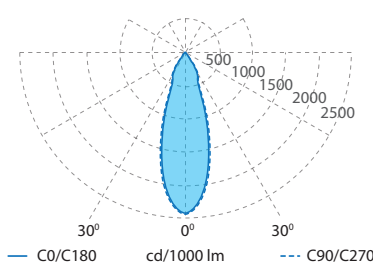


36°

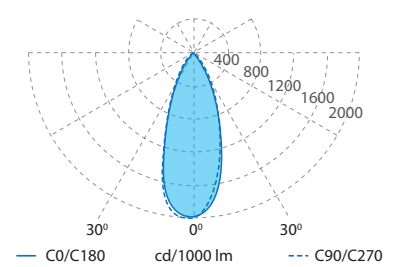


36°S

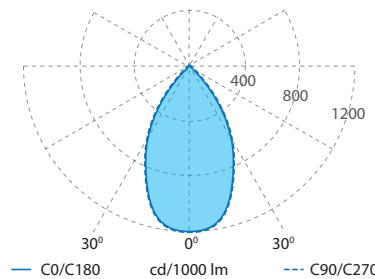

60°

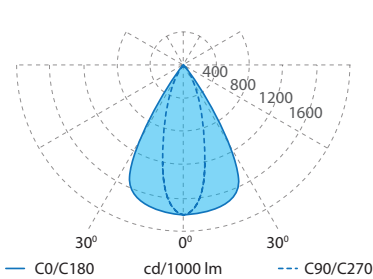

62°x34°

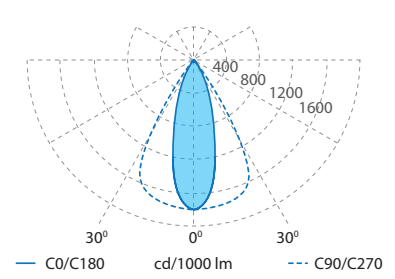

34°x62°

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 °C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.