

# Rony

## SPOT



## DESCRIPTION

The incredibly powerful Rony spotlight offers up to 8,000 lumens at the same time and, thanks to its deep reflector, creates comfortable lighting.

The need to cool such a powerful lamp determined its original design.

Due to its power, the luminaire can be installed at high heights, and the use of the BatWing reflector makes it possible to simultaneously illuminate two opposite shelves, without creating discomfort for customers.



website



### High power of the luminaire.

Power up to 67W - allows you to use fewer luminaires on a project to achieve the same illumination level.



**Low UGR.** Thanks to the deep reflector of the luminaire, it does not blind the customer.



**Ability to use a special spectrum of light sources for products.**




**Variety of reflectors for different tasks.** The BatWing reflector allows you to illuminate opposite racks without dazzling the customer. The Oval reflector allows you to illuminate more of the required rack area.

## General specifications

Type of luminaire	Spot (spot light module)
Application areas	Accent lighting
Supply unit	LED Driver integrated
Nominal voltage	230V, 50Hz
Lighting technology	LED COB
Optic	Aluminum reflector MIRO-Silver®
Power factor	0,95
Cooling	passive
Body	aluminum
Weight	1,2 kg
Package	Single / group
Life time	50 000 hours
Warranty	5 years/50 000 hours
Certification	CE, UKCA, UA

## Dimensions

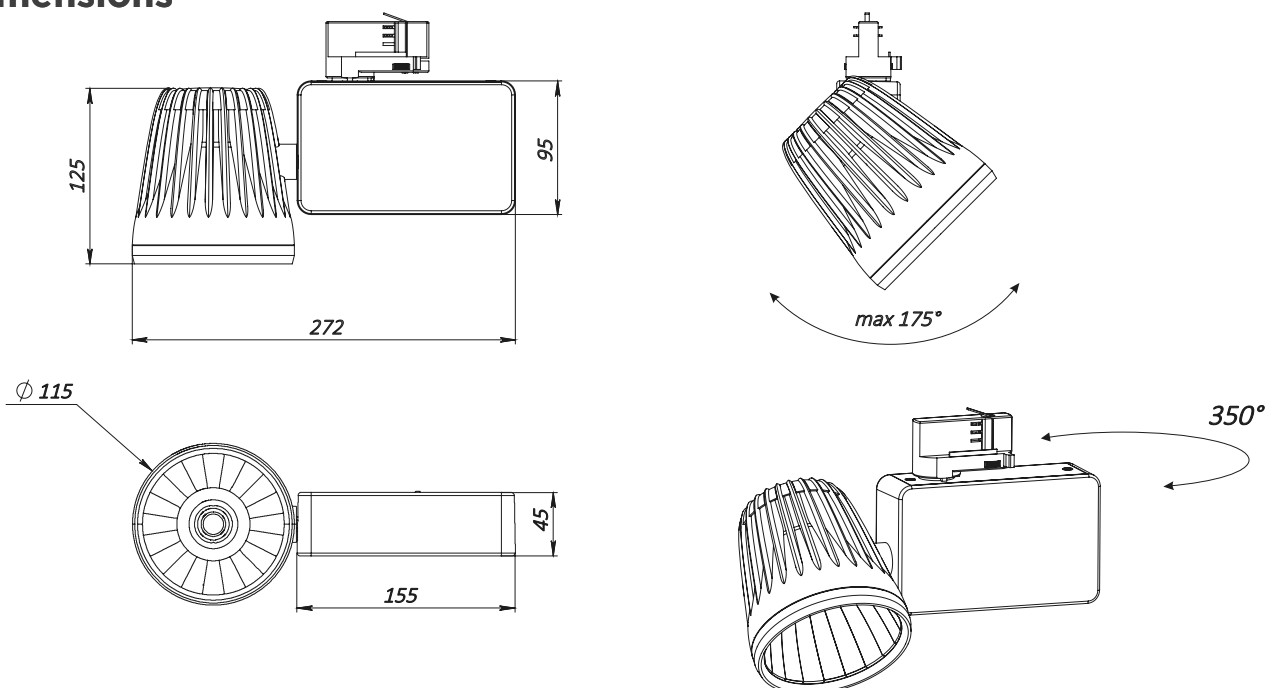

## Scope of application



# Rony


## SPOT

### Nomenclature


Luminaire SPOT Rony			SO	60°	26W	840	SM	IP21	BL				
Order Type	Luminaire Filter Type	Luminaire Beam Angle	Luminaire Power, W	Luminaire Color Rendering Index (CRI)	Luminaire Color Temperature, K	Special Luminaire Light	Luminaire Mounting Type	Luminaire IP Rating	Luminaire Housing Color				
SO	HF	16°	26	8	3000	meat red meat white meat vivid elite bread bread vivid bakery cheese vegetables&fruits vegetables&fruits vivid fish white fish vivid fish premium color 3000 bright color 3000 bright color 3500 true white premium white 3000 premium white 3500 premium white 4000	3PH	IP21	BL black RAL 9005				
		16°S	30		3500								
		30°	34		4000								
		36°S	40	9	2700								
		42°S	49		3000								
		60°	55		3500								
		60°S	59		4000								
		34°x59°	67										
		59°x34°											WH white RAL9016
		DS20Wx60											
		DS30Wx60											
		40°x80°											
		80°x40°											

The deviation of actual power consumption from the specified values does not exceed ±5%;  
 The luminous flux calculation is based on LEDs with a color temperature of 4000K, CRI80. The deviation of luminous flux from the specified values does not exceed ±10%


## Beam angle




**16°**




**16°S**




**30°**




**36°S**




**42°S**




**60°**




**60°S**




**34°x 59°**




**59°x 34°**




**DS20Wx60**



**DS30Wx60**



**40°x 80°**



**80°x 40°**

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 °C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.