

FastLine Space 3PH-D

LINE



DESCRIPTION

The FastLine Space 3PH luminaire is thoughtfully designed to combine style, comfort, and ease of installation. Its slim, compact form allows for seamless integration into retail and office spaces, providing ideal general lighting or targeted illumination for specific areas.

With its advanced flexibility and innovative design, it enhances comfort by delivering uniform, glare-free light, creating a pleasant atmosphere for both employees and customers. This luminaire not only elevates LED lighting but also ensures a quick and simple installation, making it a perfect choice for retail and office environments.



Slim Design: Perfect for perimeter and accent lighting in retail and office spaces.



Comfortable Lighting: Offers uniform, glare-free illumination for enhanced comfort.



Easy Installation: Quick and efficient setup.




Flexible & Innovative: Advanced LED technology for versatile, energy-efficient lighting.



General specifications

Type of luminaire	Line (linear light)
Application areas	general lighting
Supply unit	LED Driver integrated
Nominal voltage	230V, 50Hz
Lighting technology	LED SMD 2835
Optic	PMMA
Power factor	0.95
Cooling	passive
Body	aluminum
Weight	1.2 kg
Package	Single / group
Life time	50,000 hours.
Warranty	5 years/50,000 hours
Certification	CE, UKCA, UA

Dimensions

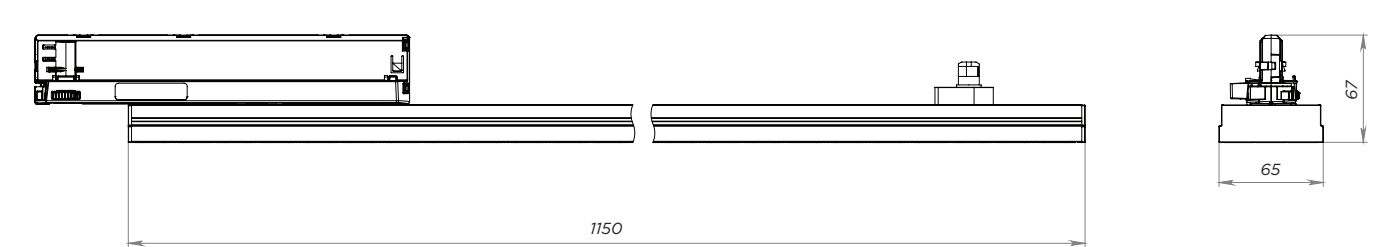

Scope of application




LINE


Luminaire FastLine Space					SO	1700	SN	3R	LF	90°	38W	840	3PH-D	IP21	BL
Order type	Conditional length	Linear luminaire configuration	Type of luminaire board	Luminaire Filter Type	Luminaire Beam Angle	Luminaire Power, W	Luminaire Color Rendering Index (CRI)	Luminaire Color Temperature, K	Luminaire Mounting Type	Luminaire IP Rating	Luminaire Housing Color				
SO	1200	SN	3R	LF	90° AS30Nx90 DS30Nx90	20	8	3000	3PH-D	IP21	BL black RAL 9005 WH white RAL9016				
						25		3500							
						30		4000							
						38									
	1700					20	9	3000							
						25		3500							
						30		4000							
						38									

The deviation of actual power consumption from the specified values does not exceed $\pm 5\%$;
The luminous flux calculation is based on LEDs with a color temperature of 4000K, CRI80. The deviation of luminous flux from the specified values does not exceed $\pm 10\%$


Beam angle

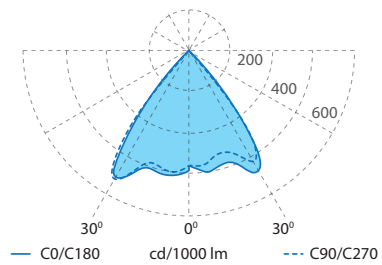

90°

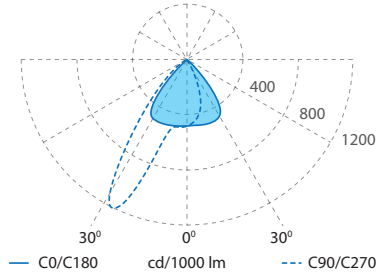

AS30Nx90

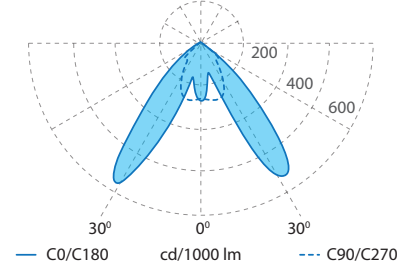

DS30Nx90

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 °C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra> 80 /> 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.